

MA 2375

TUBE INTEGRATED AMPLIFIER

McIntosh
The Compendium



FRONT PANEL: Illuminated left OUTPUT LEVEL meters (WATTS or DECIBLES). IR sensor. Digital display. Standby/On LED indicator. Illuminated right OUTPUT LEVEL meters (WATTS or DECIBLES).

ANGLED PANEL: INPUT/TRIM control. HEADPHONES jack. Equalizer controls: 30Hz, 125Hz, 500Hz, 2,000Hz and 10,000Hz. STANDBY/ON indicator. POWER / VOLUME/TRIM control.



BACK PANEL: Right speaker OUTPUT 1 connectors for a 4, 8 or 16 ohm speaker. Left speaker OUTPUT 1 connectors for 4, 8 or 16 ohm speaker. ⚡ Power cord receptacle. Fuse. SERVICE PORT. EXTERNAL CONTROL: RS232 / IR Input. DATA PORTS 1, 2. POWER CONTROL: TRIGGER out, PASSTHRU in. PHONO INPUTS: Right and Left. GROUND binding post. ⚡ BALANCED INPUTS: 1 Right, 1 Left, 2 Right, 2 Left. UNBALANCED INPUTS: Left & Right 1, 2 and 3. Left & Right OUTPUT 2 / SUB.

MA 2375


TUBE INTEGRATED AMPLIFIER

McIntosh

The Compendium

SPECIFICATIONS: **FTC Power Output Rating:** 75 watts. **Rated Output:** Output 1: 75 watts; Output 2: 1.7V; Sub: 1.7V. **Output 1 Load Impedance:** 4, 8 or 16 Ω . **Rated Power Band:** 20Hz to 20k Hz. **Total Harmonic Distortion:** 0.5% maximum with both channels operating from 250 milliwatts to rated power, 20Hz to 20k Hz. **Intermodulation Distortion:** 0.5% maximum, if the instantaneous peak power output does not exceed twice the rated power output for an combination of frequencies from 20Hz to 20k Hz. **Dynamic Headroom:** 1.2 dB. **Wide Band Damping Factor:** Greater than 22. **Frequency Response:** +0, -0.5dB from 20Hz to 20k Hz; +0, -3dB from 10Hz to 50k Hz. **Preamplifier Output Impedance:** 100 Ω . **Sensitivity (for rated output):** Unbalanced: 300m V; Balanced: 600m V; Phono – 3m V. **Signal To Noise Ratio (A-Weighted):** Unbalanced: 95 dB below rated output; Balanced: 95 dB below rated output; Phono: 75dB below rated output*. **Input Impedance:** Unbalanced: 22k Ω ; Balanced: 44k Ω ; Phono: 100 - 47K Ω ; 50pF – 400pF. **Maximum Input Signal:** Unbalanced: 5 V; Balanced: 10 V; Phono – 80mV*. **Voltage Gain:** High Level to Output 1: 38dB (8 Ω); High Level to Output 2: 15dB; Phono to Output 1: 78dB (8 Ω)*; Phono to Output 2: 55dB*. **Headphone Load Impedance:** 100 to 600 ohms. **Trigger Output:** 12VDC, 25mA. **Power Requirements:** 120 Volts, 50/60Hz at 3.6 amps. **Power Guard Screen Grid Sensor.** Sentry Monitor. Direct Coupled. Has **HR085** hand remote.

TUBES: **Preamplifier:** 2-AT7, 2-12AX7A. **Power Amplifier:** 4-KT88, 4-AT7.

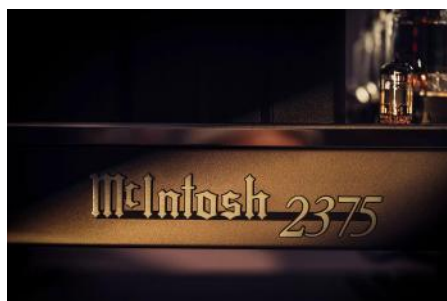

MA 2375 - Sold from June 2026 - Current.

S/N: AMX1001~AMX????

Size: 9-15/16"H, 17-3/16"W and 20-7/16"D.

Weight: 93 lbs.

\$15,000.00